
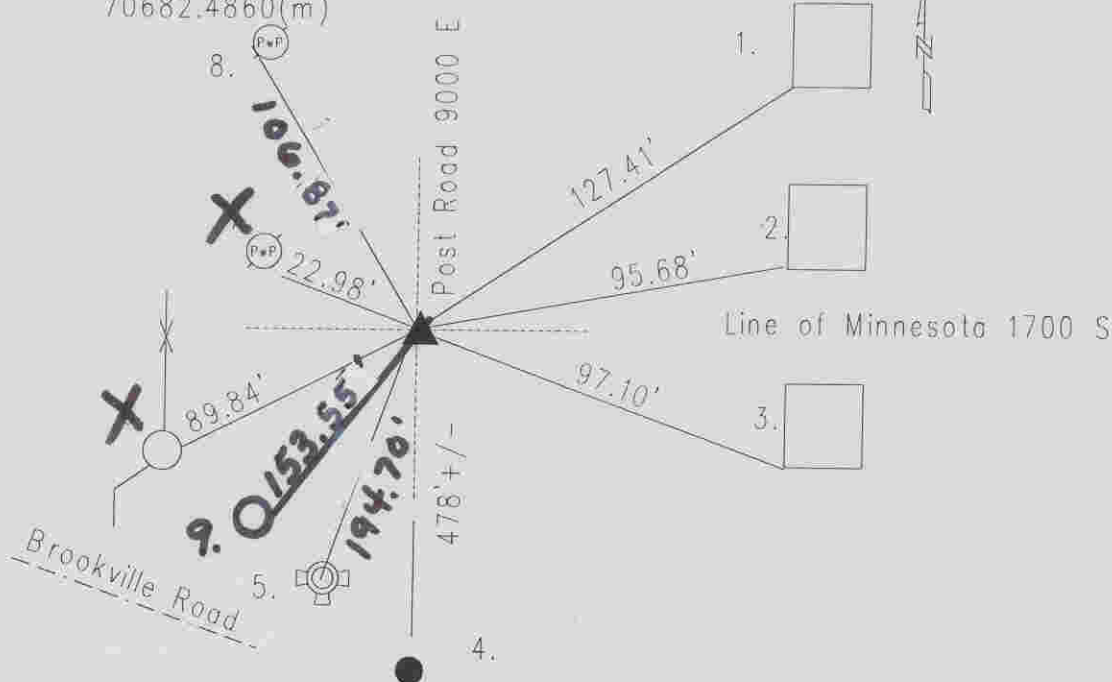


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 17 TOWNSHIP 15 RANGE 5
DATE: 5-10-04 10-09-06
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison Reset
METHOD OF ESTABLISHMENT: County 7-20-99

IN. S.P.C. E ZONE NAD '83
NAME: 15051704
N: 499538.5570(m)
E: 70682.4860(m)

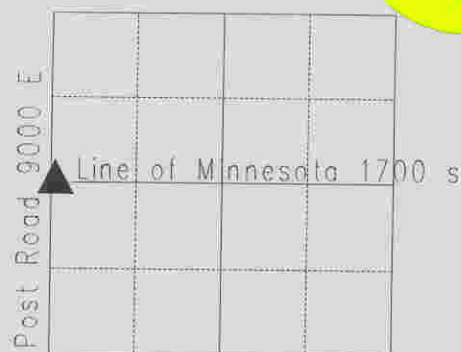

Original post set 1820 by John Hendricks with witnesses: 6' sugar S 26 E 24 links, 8' beech N 53 E links per Marion County Atlas pg. 14. D.B. Hosbrook 4-23-1855 indicates no stone nor witnesses per Warren Township Legal Survey Book pg. 33. Baden 8-5-55 called road nail with brass washer. G.W.S. 6-26-72 called the same. McLand 1-30-69 called a PK nail. Fortner 1-27-75 called the same. Gries 8-27-87 called the same. Kiste 10-21-94 called the same. Excavated 7-20-99 by Wilcoxon, and PK nail was found 5' down. A railroad spike was found 15' down. A stone was found 18' down. Harrison set.

15051704		
REF.	DISTANCE	DESCRIPTION
1.	127.41'	SW corner of ADDRESS 1639 brick
2.	95.68'	SW corner of ADDRESS 1643 frame/siding
3.	97.10'	SW corner of ADDRESS 1705 brick
4.	478'+/-	Due S to C/L of Road Brookville
5.	194.70'	Top nut of fire hydrant
6.	89.84'	Center of steel fence post
7.	22.98'	Mag nail w/brass washer S PwP#43 621 12"up
8.	106.87'	Mag nail w/bw SW PwP#338-581 24"up
9.	153.55'	Mag nail w/bw NW PwP#48-621 12"up